

Max. Differential Pressure: 4.5 bar 65 psi
 Max. Flow: 120 l/min 32 gal/min
 Max. Liquid Temperature: 85 °C 185 °F
 Wet Materials: PTFE, PFA, PVDF, ECTFE
 Supply Voltage: 230 V (AC, single phase) and 115 V (AC, 3-phase)



Figure 11: Levitronix® Pump System BPS-4

Figure 12: Pressure-flow curves for BSP-4 with water @ 25°C


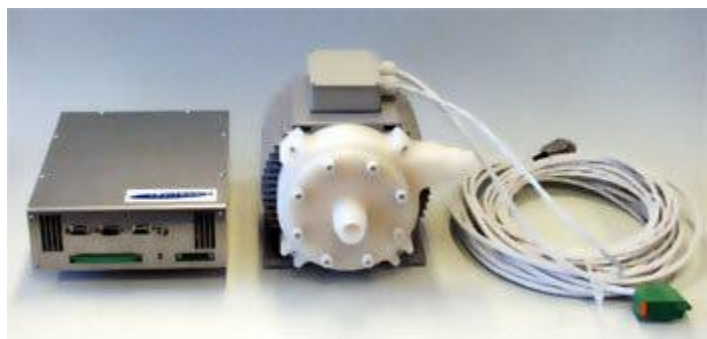


Figure 2: Bearingless pump system for AC voltage supply BPS-4

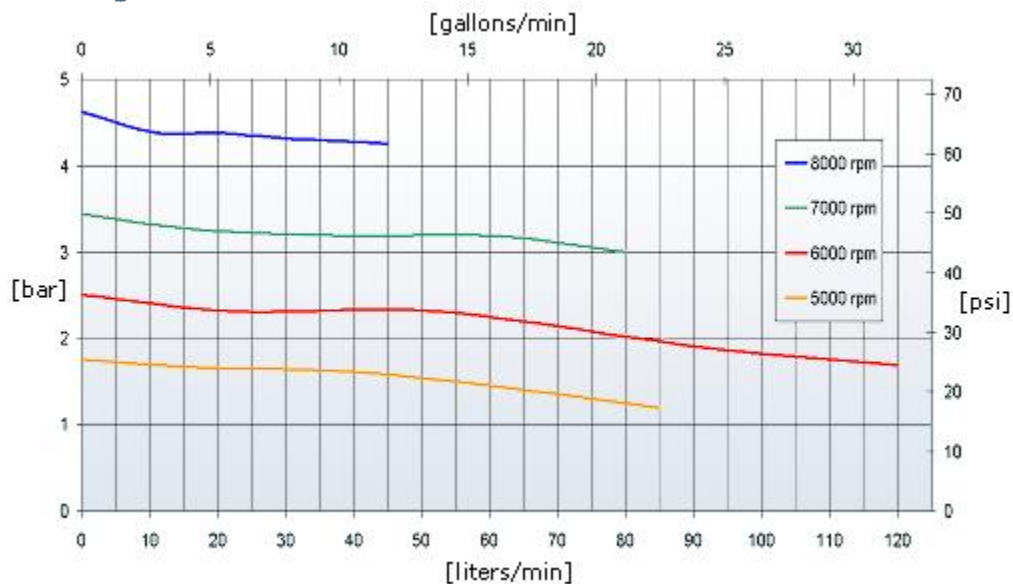